

SPATIAL DESIGN / CONSTRUCTION DOCUMENTATION

TOE TET MYANMAR

Bakery Raw Material Showroom Transformation


Existing-condition verification, showroom planning, customer circulation, demolition coordination, MEP coordination and setting-out documentation combined into one practical delivery workflow.

5.238 m frontage

6.0 m depth

1.6 m clear aisle


TOE TET MYANMAR — MASTER PLAN V1.1

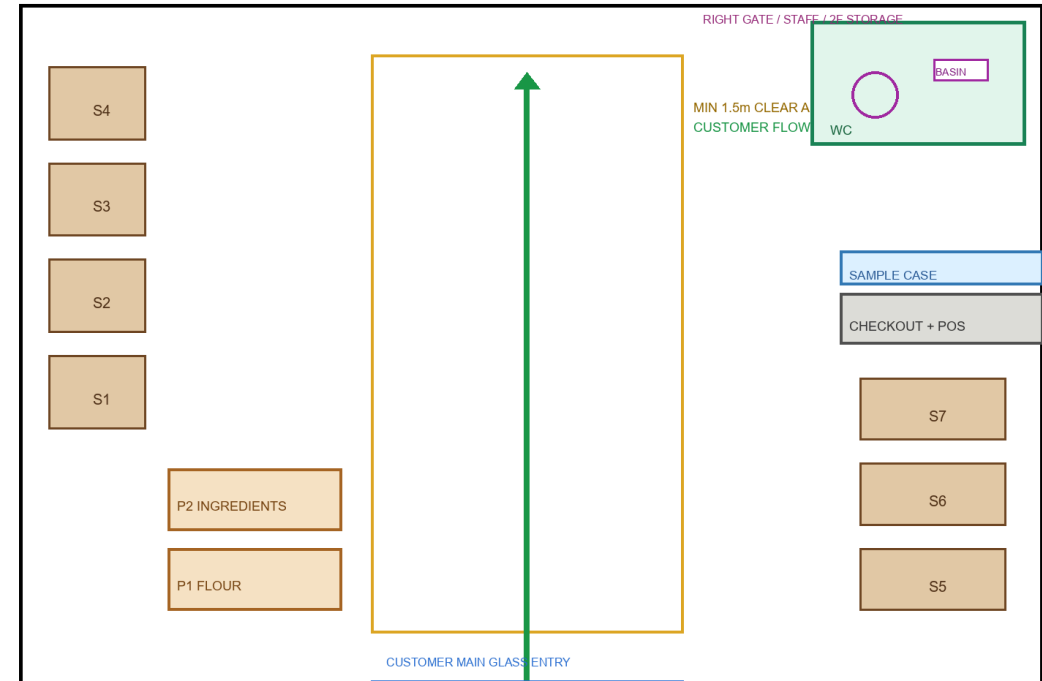

Central X=1800..3400 is intentionally empty | S1-S7: Wood Shelving | No Workstations

Verified Existing Building Baseline


Ground-floor and first-floor source drawings are retained as the evidence baseline before any proposed showroom work.

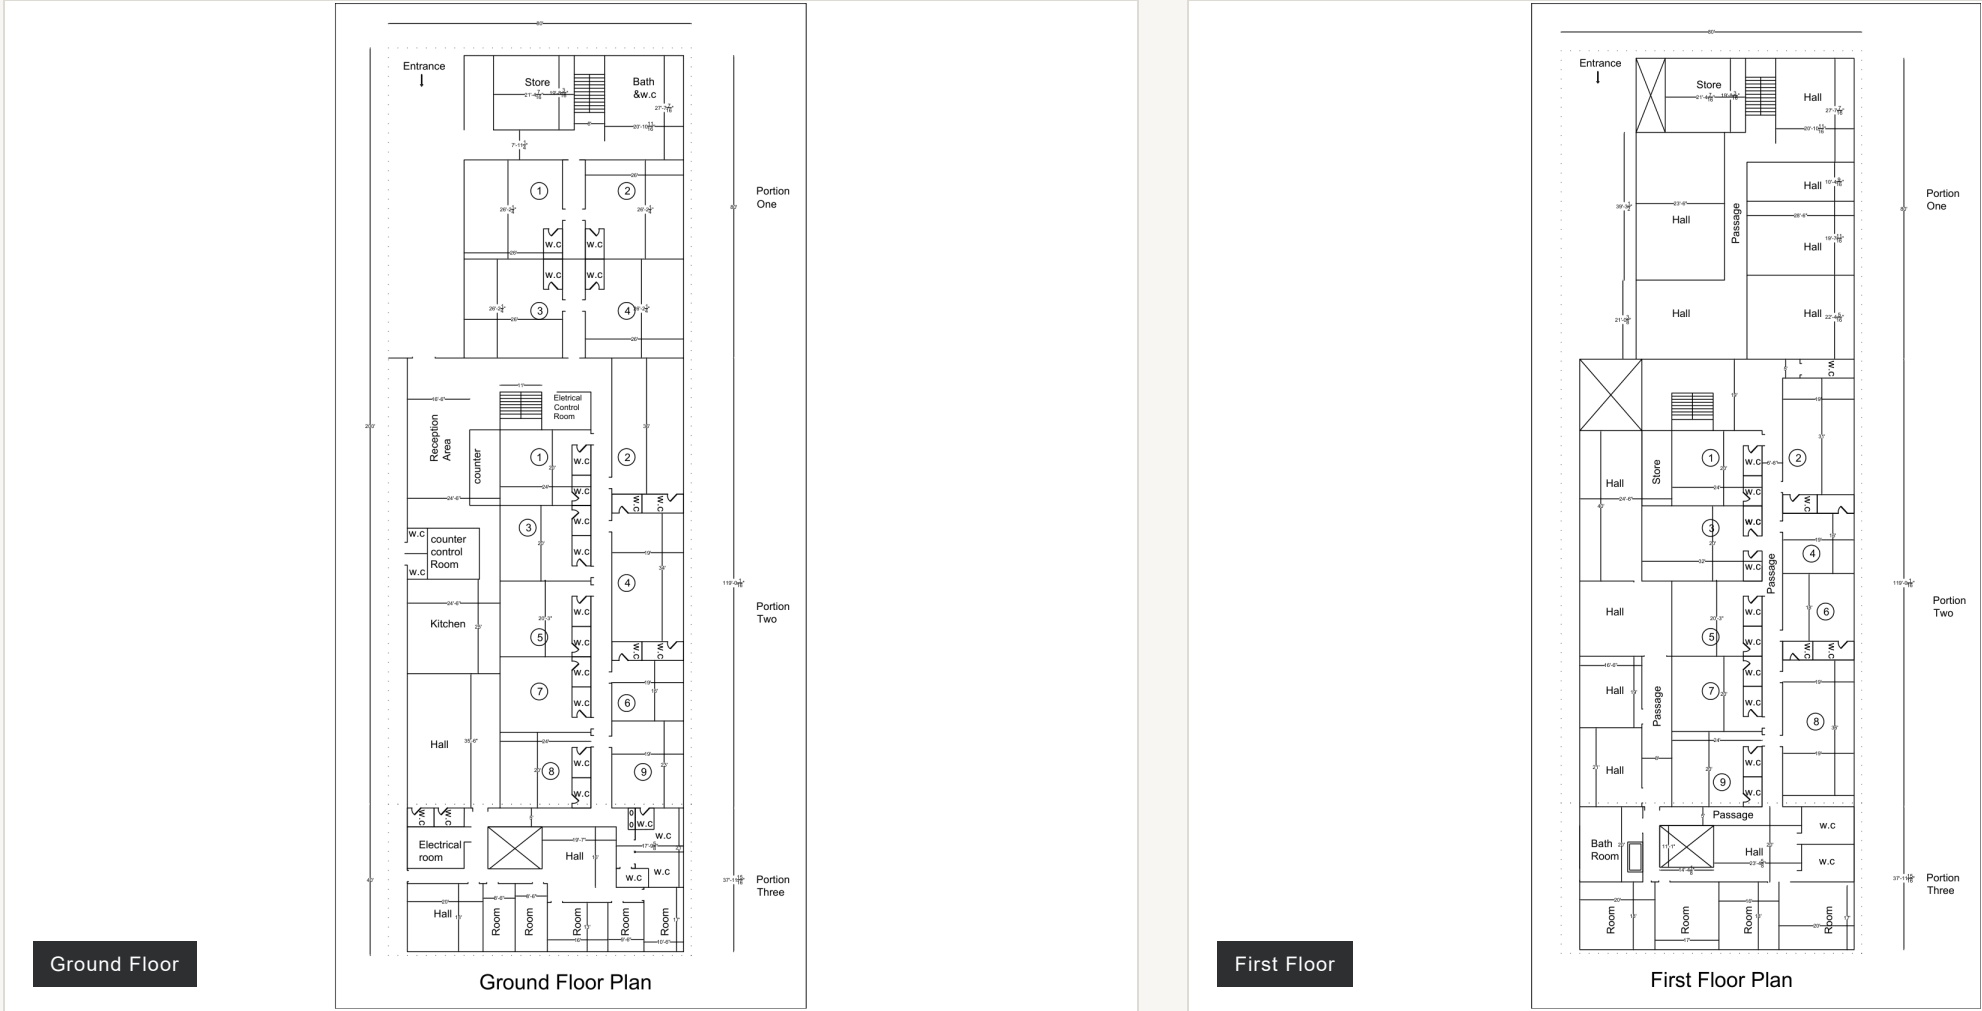

Showroom Master Plan

The proposed plan organizes customer movement, display shelves, ingredient platforms, checkout / POS and

TOE TET MYANMAR — MASTER PLAN V1.1

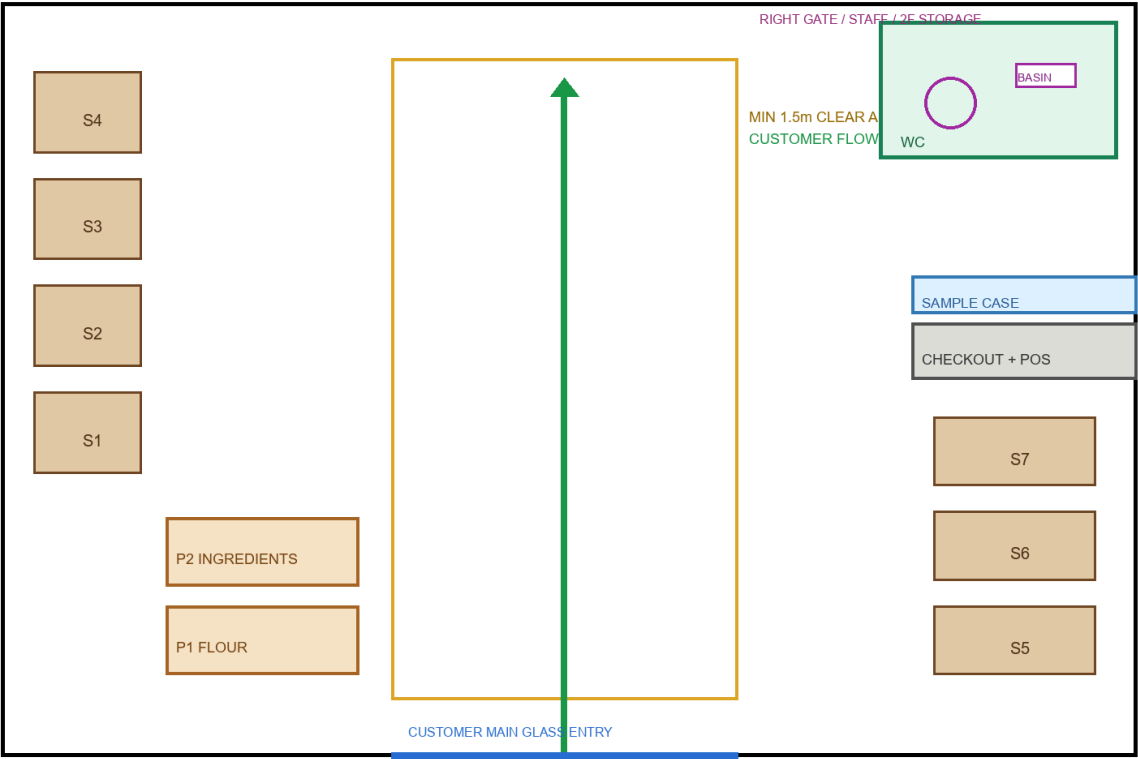

Central X=1800..3400 is intentionally empty | S1-S7: Wood Shelving | No Workstations

Planning Priorities


- Clear customer entry
- 1.6 m central aisle
- Product visibility
- Wall shelving zones
- Ingredient display platforms
- Checkout + POS
- Retained WC relationship

EXISTING SHELL RETAINED. PROPOSED INTERIOR GEOMETRY FOLLOWS THE VERIFIED V1.1 DESIGN BASELINE.

From Design Intent to Site Positioning

Key aisle, entry, shelving and checkout dimensions are translated into a site-readable setting-out plan.

TOE TET MYANMAR - SETTING-OUT PLAN V1.1

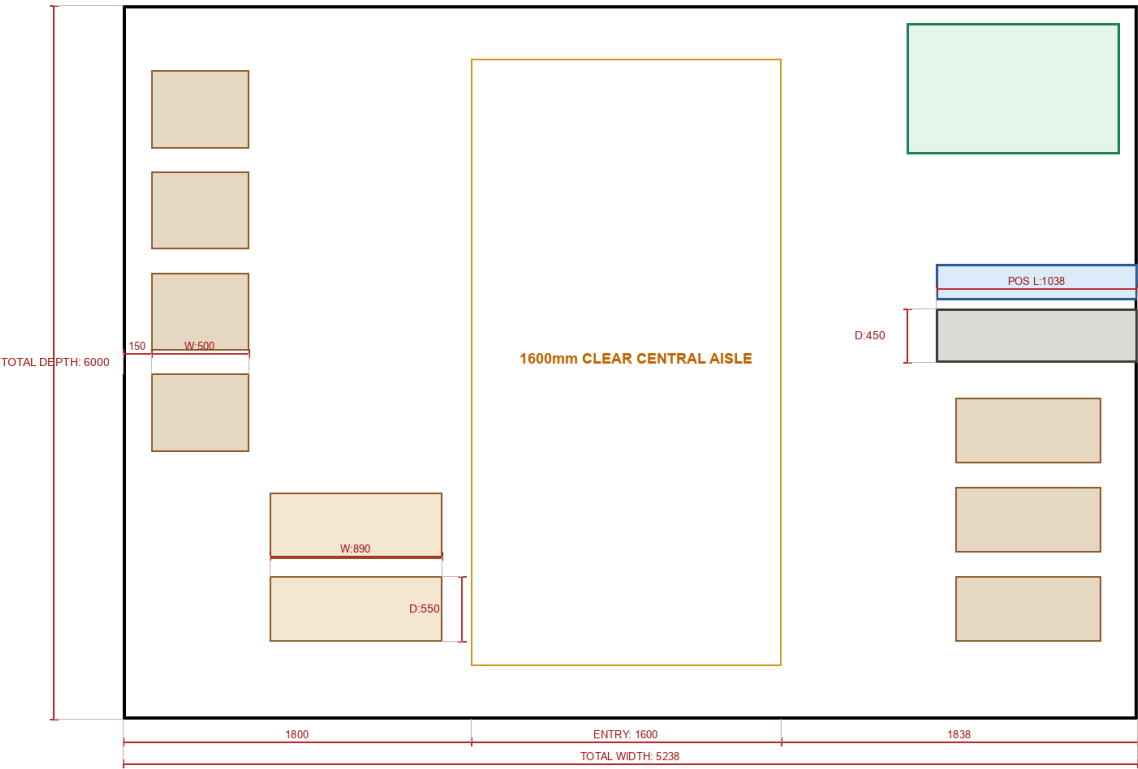

SETTING-OUT SPECIFICATIONS & BENCHMARK

1. AXIS BENCHMARK: Setting-out must align symmetrically with Entry Centerline (X=2600). Central 1600mm axis must remain 100% collision-free.

2. TOLERANCES: Shelves S1-S7 depth 500mm with 150mm rear wire raceway. Checkout desk cast in microcement base (60mm slab thickness).

Setting-Out Controls


- Total width: 5238 mm
- Total depth: 6000 mm
- Entrance: 1600 mm
- Central aisle: 1600 mm
- Shelf depth control
- POS / checkout location

SITE EXECUTION IS DIMENSION-DRIVEN,
NOT INFERRED FROM PRESENTATION
IMAGERY.

Remove Only What the New Layout Requires

The demolition drawing identifies removable partitions, retained WC elements, sealed abandoned plumbing

TOE TET MYANMAR — DEMOLITION PLAN V1.1

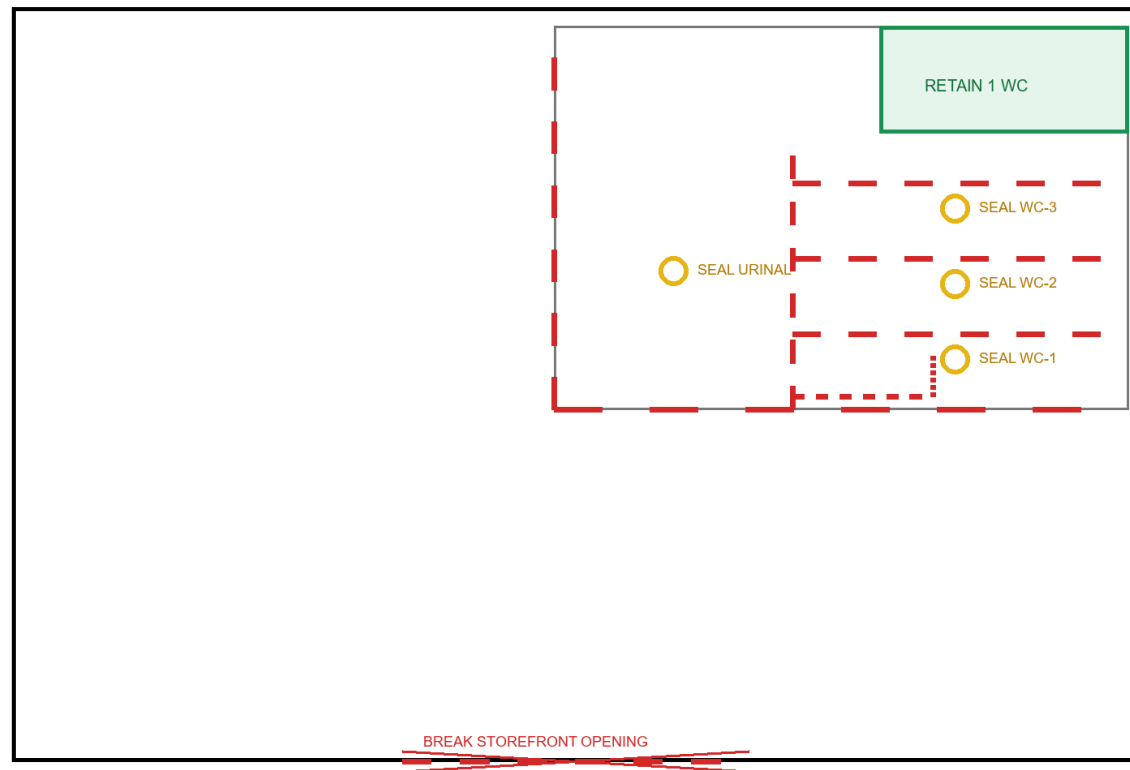

Red dashed = remove enclosure/partitions. Yellow = 4 airtight odor-seal points.


Demolition Scope

- Remove redundant WC partitions
- Retain one WC
- Seal abandoned WC points
- Seal urinal connection
- Create storefront opening
- Protect retained shell

DEMOLITION IS COORDINATED AGAINST
THE NEW SHOWROOM PLAN BEFORE FIT-
OUT.

Services Coordinated With the New Layout

Plumbing, lighting, POS power and data requirements are coordinated against the proposed spatial

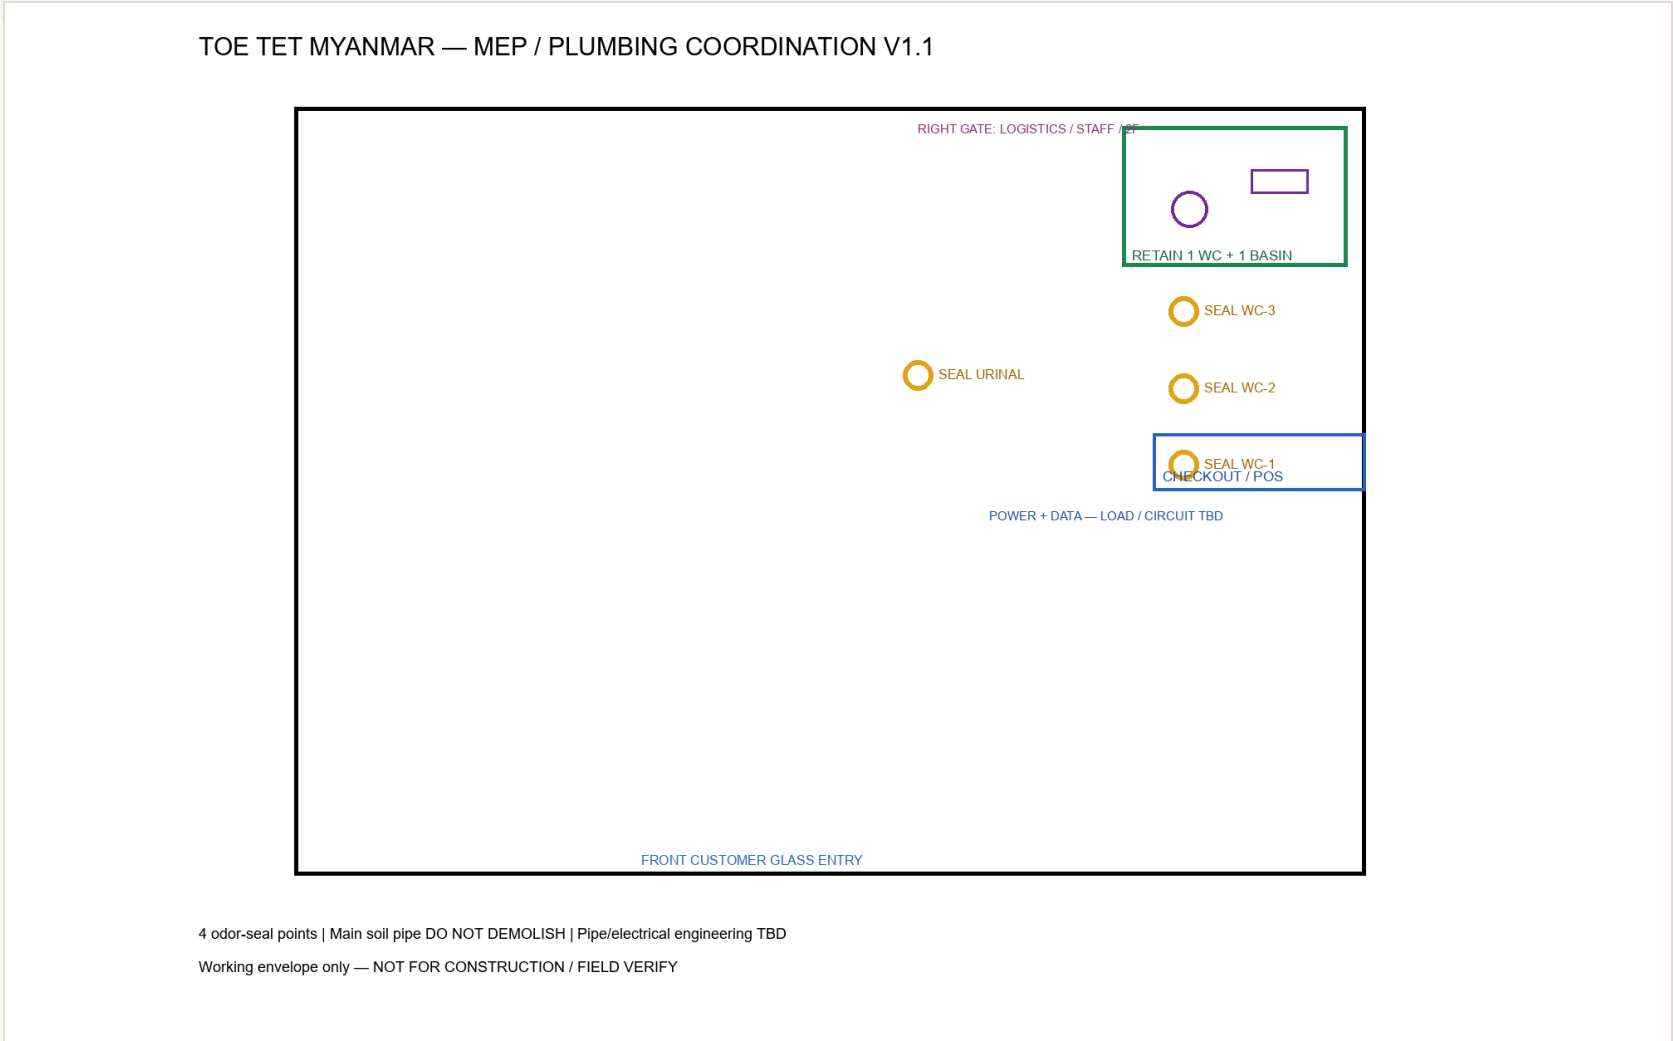


Coordinated Services

- Retained WC plumbing
- Basin services
- Abandoned pipe sealing
- Lighting circuits
- Checkout / POS power
- Data connection provision

MEP INFORMATION IS TIED TO THE SPATIAL AND SETTING-OUT BASELINE.

From Existing Condition to Contractor-Ready Package

TOE TET MYANMAR — 2F GENERAL MATERIAL STORAGE CONCEPT

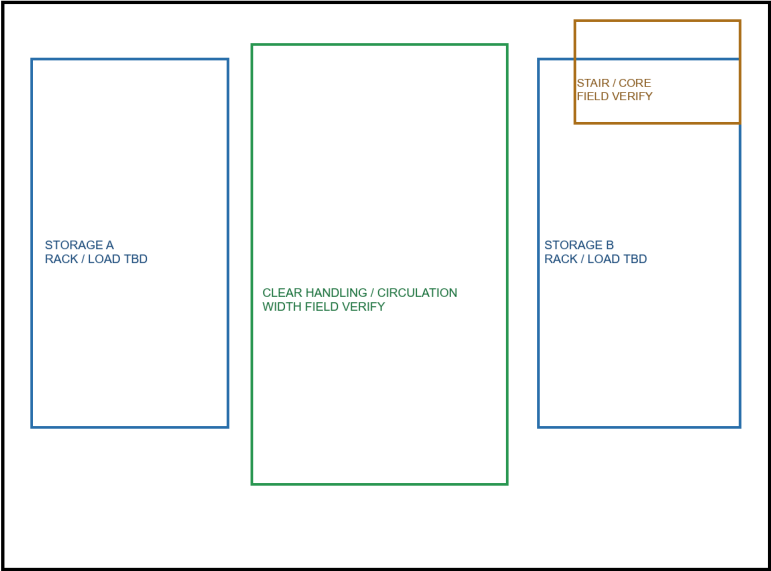

No fixed rack size / load / anchorage | Working envelope only | NOT FOR CONSTRUCTION

The project package combines spatial design, technical coordination and practical procurement / contractor preparation into one traceable workflow.

Master Plan Showroom zoning and circulation	Setting-Out Site dimensions and fixture positions
Demolition Plan Remove / retain / seal scope	MEP Coordination Plumbing, lighting, POS and data
2F Storage Concept General-material handling layout	Site Verification Field checks before final execution
BOQ Framework Quantity and pricing preparation	Contractor RFQ Structured quotation workflow

Existing → Verify → Plan → Coordinate → Set Out → Price → Build